




اول غرفة قابلة للطي | **FC1**
في السعودية | بريفابل

**FOLDABLE
CONTAINER
ROOM - FC1**

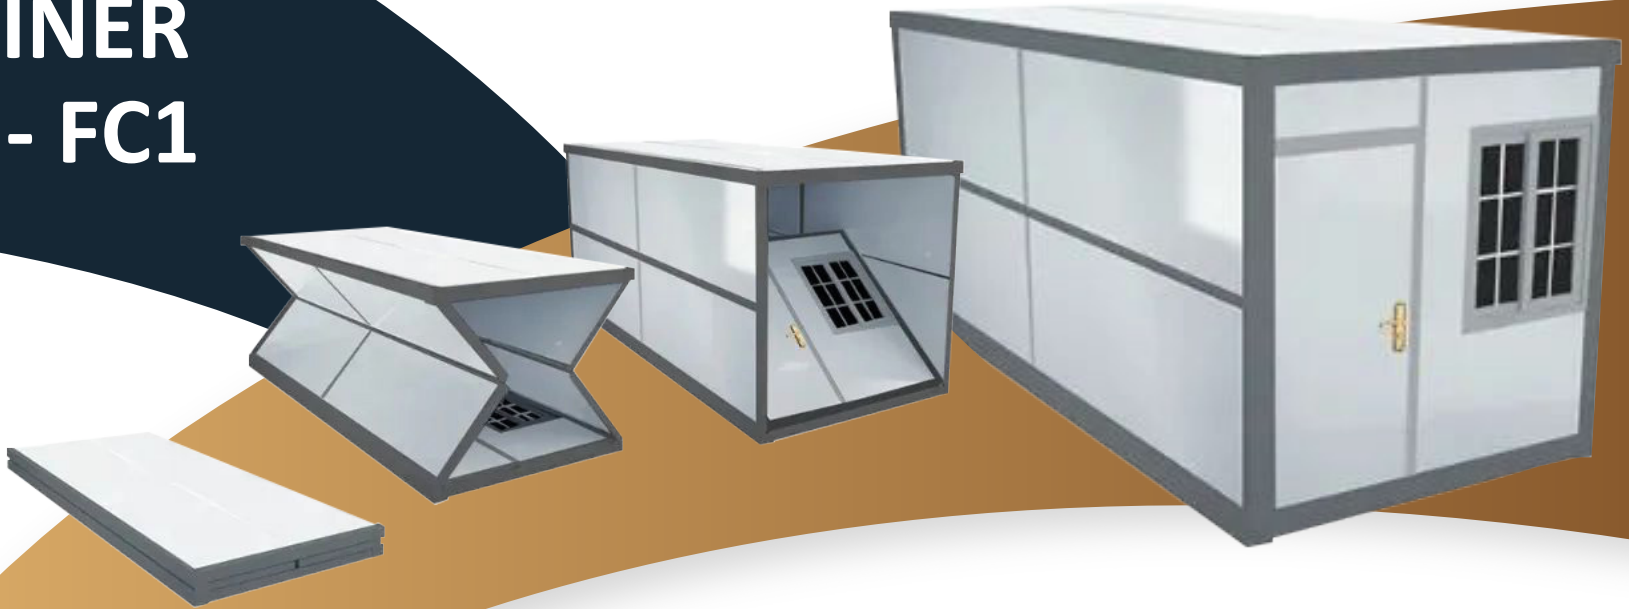

مقاوم للرياح العالية
وللزلزل
High wind &
Earth quick
resistant

سهل الفك والتركيب والنقل
والتخزين
Easy to Install,
disassemble transport
and store


ارضية مصنوعة من
الاسمنت او المغنيزيوم
بورق المقاوم للحريق

Floor made of fire-resistant
cement or magnesium
board


مصنوعة من الحديد
المجلفن والساندوش بانل
المقاوم للحريق
Made of galvanized
Steel and fire-resistant
sandwich panels

عازل حراري ممتاز
Excellent thermal
insulation

يمكن استخدامها
بشكل
طابقين لسكن العمال
It can be used as
two floors for
workers 'Camping

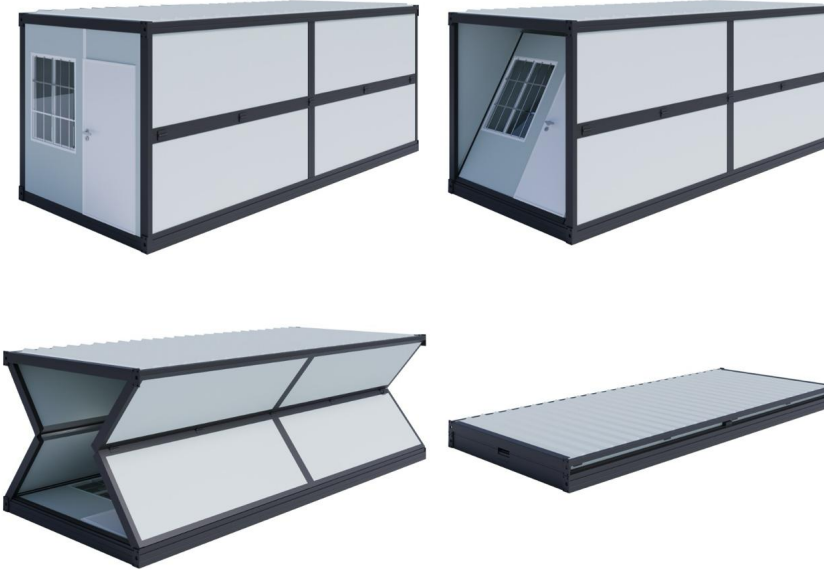



توفير مثالي في مساحات التخزين. Ideal For Reducing Storage Spaces .

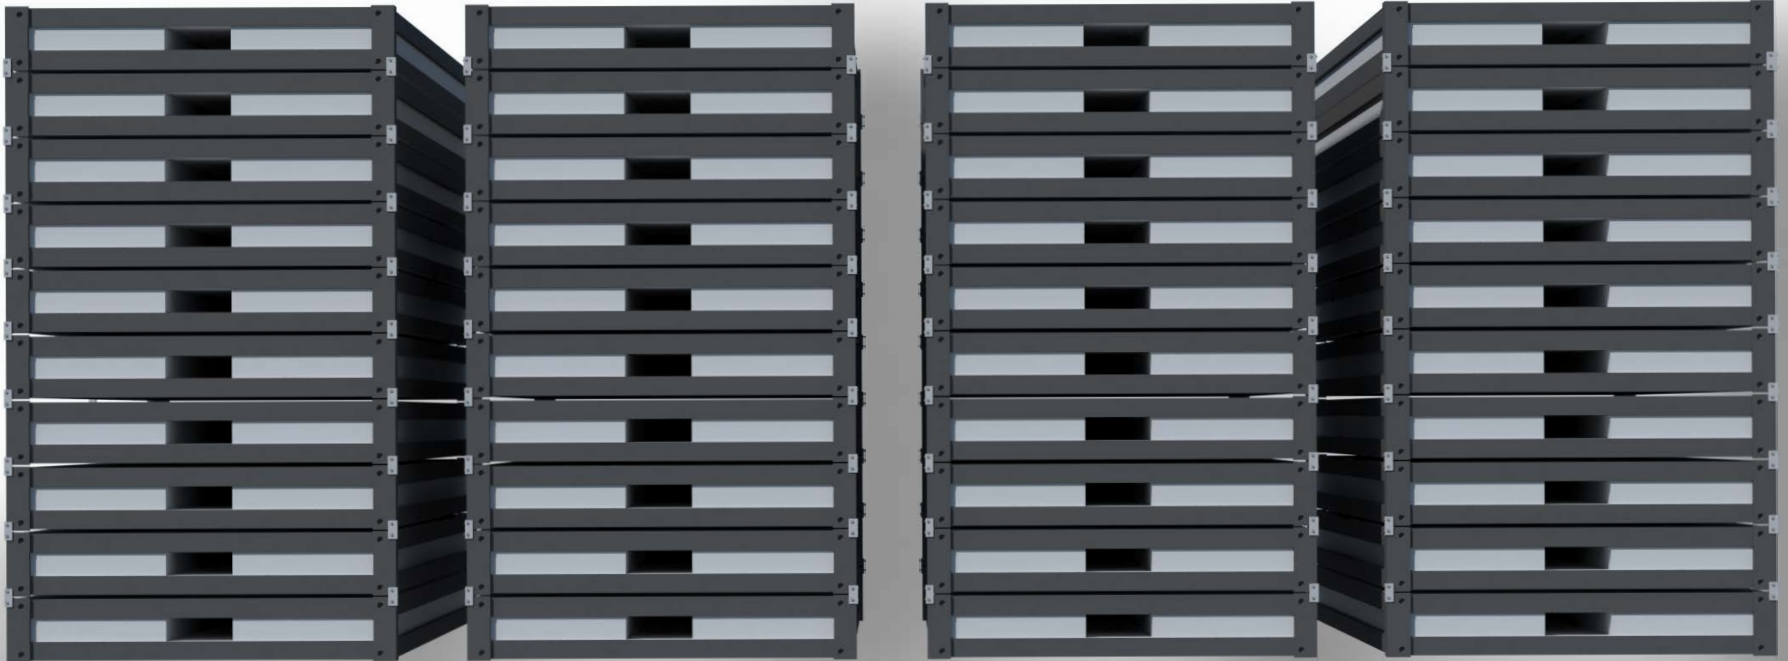

امكانية نقل تصل لغاية ١٢ غرفة على شاحنة واحدة .

Loading up to 12 rooms on one truck .

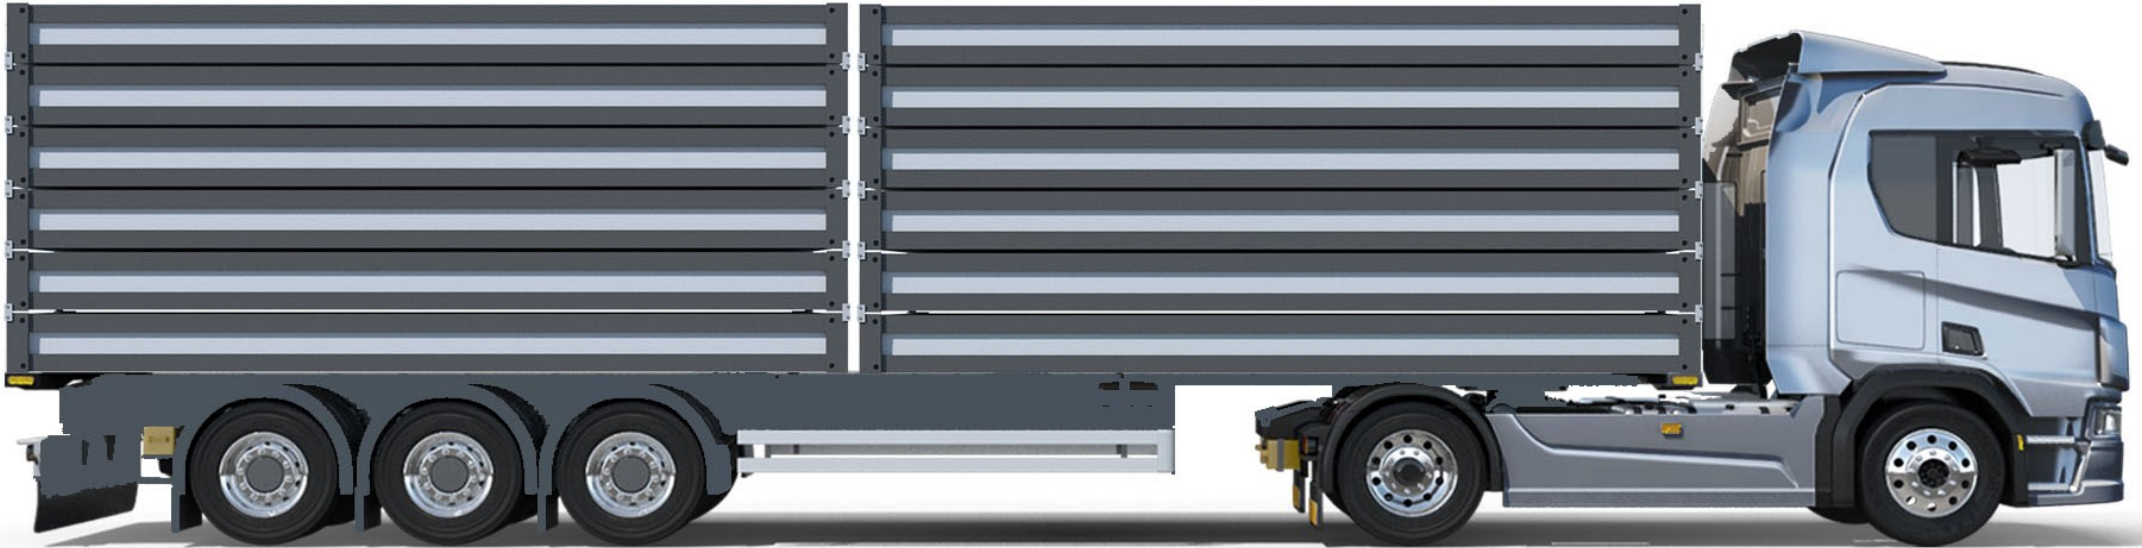



صفوف المدارس المؤقتة
temporary school classrooms



غرف حراسات امنية
security guard rooms



سكن عمال
Workers Camping



مخازن متنقلة
warehouses



اكشاك الفعاليات
event Kiosks


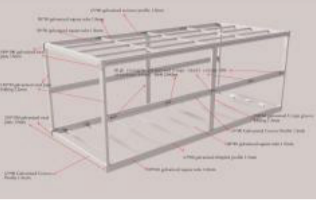
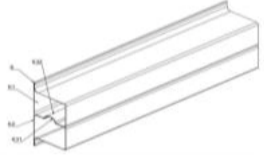














مشافي مؤقتة
temporary hospitals



غرف الاغاثة الطارئة
emergency relief rooms

Material parameters

Form 1	Standard container	Expansion Size : 5800 mm (L) * 2500 mm (W) * 2390 m (H) Folding size : 5800 mm (L) * 2500 mm (W) * 400 mm(H) Net Weight : 1.1 Ton	1	set		
	Farme	Top Main Beam on the long side	Galvanized concave convex pipe 63 mm* 80 mm* 1.5 mm (both sides)	3	pcs	
		Bottom Main beam on the long side	Galvanized concave convex pipe 63 mm* 120 mm* 1.5 mm (both sides)	3	pcs	
		Top cross beam (inner)	Galvanized square pipe 50 mm* 50 mm* 1.5 mm	6	pcs	
		Front and rear main beam on the short side	Galvanized concave convex pipe 63 mm* 80 mm* 1.5 (both sides)	4	pcs	
		Sidewall frame	Galvanized concave convex pipe 63 mm* 80 mm* 1.5 (both sides)	8	pcs	
		Bottom crossbeam	Galvanized square steel pipe 40 mm* 40 mm* 1.5 mm	14	pcs	
		Hanging fittings on 4 corner	Steel plate (180 mm* 100 mm* 15 mm)	8	pcs	
		Folding hinge	Galvanized hinge 85 mm* 115 mm* 3 mm (Shaft column 304 stainless steel)	36	pcs	
Integral frame protective coating	Cabaret high gloss enamel	1	set			
Roof	External roof	104 color steel tile (thickness is 0.5 mm)	6	sets		
	Internal ceiling	831 ceiling tile (thickness is 0.28 mm)	7	pcs		
	Insulation rock wool	50 mm ,load bearing 60 kg/m ³ .	18	m ²		
Floor	Grade A fireproof MGO floor	18 mm	5	pcs		
Wallboard (Support customization)	Heat insulation rock wool color steel composite sandwich panel (side wall)	0.28 mm color steel plate / 50 mm / 65 kg / m ³ rock wool 50 mm	8	pcs		
	Heat insulation rock wool color steel composite sandwich panel (Front and rear walls)	0.28 mm color steel plate / 50 mm / 65 kg / m ³ rock wool 50 mm	6	pcs		
Window	Aluminum alloy anti-theft integrated window (push-pull Series)	950 mm* 1200 mm alluminum alloy frame window stainless steel security griller window with window screening	2	pcs		
Door	Security Steel door with electroplating door 0.5 mm	860 mm* 1980 mm	1	ps		
Electrical system	circuit protector		1	ps		
	socket (customized)		4	ps		
	Single tube LED light		1	ps		
	Light switch (customized)		1	ps		
Technical parameters	Roof Bearing	50kgs/m ²				
	Floor Bearing	150kgs/m ²				
	Aisle Bearing	200kgs/m ²				
	Wall Stress Resistance	80kgs/m ²				
	Fire Resistance	A grade				
	Wall Deformation Coefficient	300kgs/m ²				
	Earthquake Resistance	Class 10				
	Wind Resistance	Class 10				







+966 55863 1845



www.ilc-ksa.com



info@ilc-ksa.com